inquiry form of pipe silencer

client:

job:

position:

your project no.

CONTRAST
Akustik GmbH
Willi - Bleicher - Strasse 20
D 52353 Düren
phone +49 2421 – 7800 419
fax +49 2421 – 7800 421
E-Mail : info@contrast-akustik.de

characteristics

max. operation temperature [°C]:
min. operation temperature [°C]:
operation pessure [bar(a)]:
Volume flow [Bm³/h]:
Mass flow [kg/h]:

construction

your requirements

flanges (LV), nozzle connection (LS) ☐ ☐

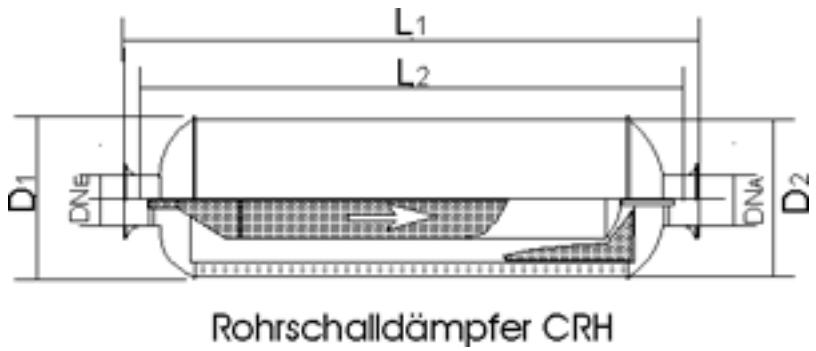

Rohrschalldämpfer CRH

Standard dimension [mm] **weight [kg]**

	L2:	L1:	D:	Ds:	with nozzle	with flanges

your requirement :
inlet flange to :
outlet flange to:

features

outlet only with nozzle:
material:
derusted by sandblasting, paint:
pressure probation:
operation pressure:
test pressure:

acoustic data

level as: Lwa [dB(A)] ☐ Lpa [dB(A)] ☐

f [Hz]	63	125	250	500	1000	2000	4000	8000	Sum
inside noise level									
requested insertion loss									